

60" Vertical Baler

The 60" Vertical Downstroke Baler is best for OCC & shrink-wrap and produces up to 1,000 lb bales.



Features & Benefits

- Easy to Use and Maintenance Friendly
- Bales a Variety of Material
- Reduces Recycling Disposal Costs and Increases Revenue
- Convenient and Time Saving

Designed For


- Shopping Malls
- Hospitals
- Supermarkets
- Hotels
- Schools
- MFRs/Recycling Centers
- Retailers
- Distribution Centers
- Manufacturing Plants

Available Options

- Counter Weighted Floppy Retainer Dogs
- Feed Chute
- Oil Heater
- Rear Feed Opening, Front Eject
- Slotted Front Door
- Weather Proof Package
- Wire Guides (front bale tie-off)
- Clothing Baler

DIM. (in./mm)

- A. 54.50/1384
- B. 88/2235
- C. 45.5/1154
- D. 139/3530
- E. 97/2481

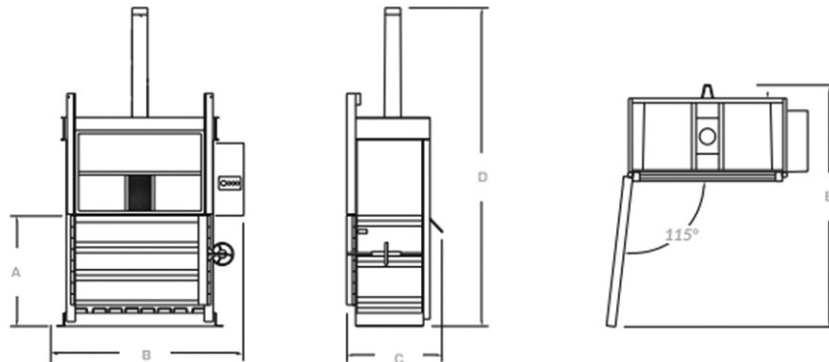

Equipment Specifications

Description	Value	Description	Value
Nominal Bale Size	60" x 30" x 48"	Ejector System	Semi-Automatic
Bale Weight	Up to 1,000 lbs OCC	Motor HP	10
Bale Volume	50 cu. ft.	Voltage 3 Phase	208V, 230V, 480V
No. of Bale Tie Slots	5	Full Load Amps	30A, 28A, 14A
Compact Force lbs (Normal/Max)	56,548 / 62,172	Pump GPM	10.5
Platen Pressure	32 PSI	Normal System Pressure PSI	2,000
Average Cycle Time	49 Seconds	Max. System Pressure PSI	2,200
Loading Height	54.50"	Cylinder Bore x Stroke	6" x 42"
Hydraulic Tank Capacity	22 Gallons		

Get a Quote Today: 336-543-2900 | sales@idealcba.com | www.idealcba.com

Specifications may change depending on the model selected. Contact IDEAL Compactors & Balers for a full equipment list.